



* ASPIRATORE AKSIALE CILINDRIKE SERIA COMPACT TCF/BB/T IP65

- Aspiratore industriale me motor 220V/400V
- Mbrojtja e motorit tek tipet 710 dhe 800 eshte IP65
- Me rezistence termike
- Behet e realizueshme lidhja direkte me tuba ne linje
- Me helike plastike PVC pervec tipeve TCBT/4 710, TCBT/4 800 qe kane helike prej alumini
- Rregullimi i shpejtesise tek aspiratoret monofaze deri ne $\Phi 630\text{mm}$ realizohet me REB 5000W ndersa tek aspiratoret trefazore me INVERTER

Sipas porosise me motor 2, 6 ose 8 polesh me drejtim te ajrit helike – motor dhe anasjelltas, gradim te fleteve si dhe me motor antiexplosiv te tipit EXLL2G EEXELLT3 vetem per aspiratoret trefazore




TCFB=230V
TCFT=400V


TCFB=HELIKE PLASTIKE PVC
TCBB=HELIKE ALUMINI

EMERTIMI	PRURJA (m³/h)	FUQIA (W)	RROT/MIN (rpm)	NIVELI ZHURMES dB(A)	DIAMETRI I HELIKES Φ (mm)	PESHA (kg)	CMIMI
TCFB/4-250/H	1215	60	1330	52	250	8	€
TCFB/4-315/H	2340	100	1300	54	315	11	€
TCFB/4-355/H	3470	200	1225	58	355	13,2	€
TCFB/4-400/H	5100	340	1200	60	400	15,5	€
TCFB/4-450/H	7100	480	1290	65	450	21	€
TCFB/4-500/H	9710	650	1290	68	500	25	€
TCFB/4-560/H	13780	980	1250	71	560	33	€
TCFB/4-630/H	18200	1700	1200	74	630	40	€
TCFT/4-710/H	25500	2200	1450	78	710	46	€
TCFT/4-800/H	43200	8800	1460	89	800	89	€

DIMENSIONET

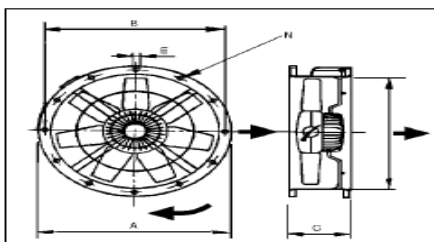

Type	Φ A	B	C	2 poles	Φ D	Φ E	No. of holes N
250	327	292	170		254	10	4
315	386	355	170	320	315	10	8
355	426	395	170	320	355	10	8
400	487	450	170		400	12	8
450	537	500	180		450	12	8
500	595	560	180		500	12	12
560	655	620	240		560	12	12
630	725	690	240		630	12	12
710 (6 y 8 polos)	806	770	240		710	12	16

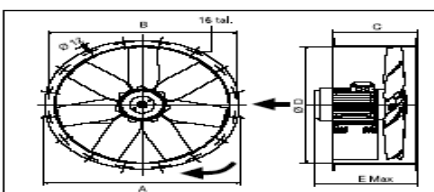

Type	Φ A	B	C	Φ D	E		
					4 poles	6 poles	8 poles
710/L (4polos)	806	770	350	710	405	-	-
710/H (4polos)	806	770	350	710	426	-	-
800/L	896	860	350	800	419	398	398
800/K	896	860	350	800	415	419	398
800/G	896	860	350	800	471	415	419
800/H	896	860	350	800	471	415	419



VENKONAIR



Ventilim - Kondicionim - Ngrohje

www.venkonair.com

☎ 00355 28380015 – 00355 682042413